


NCB21 FS2

NEOLX

With the NEOLUX LED Canbus Control, you can eliminate error messages as well as indicator hyperflashing, both of which can result from the low amount of electricity used by LED retrofits. Through the thermal decoupling from the lamp, the LED Canbus Control ensures that the brightness and lifetime of your LEDs are maintained.

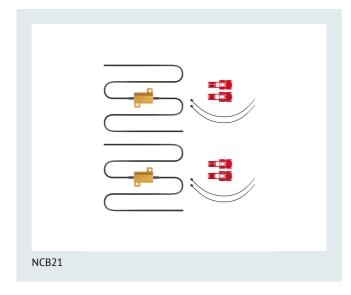

Product family benefits

- No irritating warning lights
- No extra heat for lamps compared to lamps with included resistor
- Maintain full benefits of your NEOLUX LED retrofits and NEOLUX fog light
- · User friendly handling
- Longer replacement cycle of retrofit

Product family features

- Elimination of error messages caused by lower wattages of LED lamps
- Long lifetime
- Available for 5 W or 21 W
- · Universal fit
- · Good quality thanks to robust components

Areas of application

 Eliminates warning messages created by the lower level of energy consumption of LED Retrofits


Product datasheet



Application (Category and Product specific)	Accessories for LED retrofits	
Electrical data		
Power input	25.20 W	
Power input tolerance	±20 %	
Nominal wattage	21.00 W	
Dimensions & weight		
Diameter	20.0 mm	
Product weight	26.00 g	
Length	27.0 mm	
Lifespan		
Lifespan Tc	2000 h	
Lifespan B3	2000 h	
Capabilities		
Technology	LED	
Certificates & standards		
ECE category	-	
Logistical data		
Order reference	NCB21	
Environmental information		
Date of Declaration	19-01-2022	
Primary Article Identifier	4052899489134	
Candidate List Substance 1	Lead	
CAS No. of substance 1	7439-92-1	
-	The identification of the Candidate List substance is sufficie to allow safe use of the article.	
Safe Use Instruction	to allow safe use of	

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
NCB21	4052899489134	Folding box	2

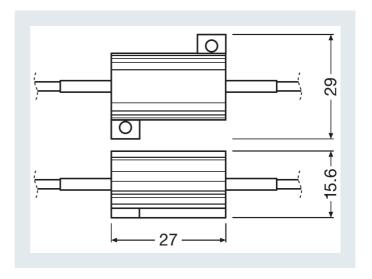



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 6 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com